

# AN6915, AN6916, AN6916S

## Large Sink Current Dual Comparators





### Overview

The AN6915, the AN6916 and the AN6916S are dual voltage comparators with large output sink current and wide range of operating supply voltage.

### Features

- Large sink current (70mA), direct drive for relays or lamps
- Wide range of supply voltage:  $V_{CC(opr.)}=2$  to 36V
- Wide range common-mode input voltage: 0 to  $V_{CC}-1.5V$
- Open collector output

### Block Diagram

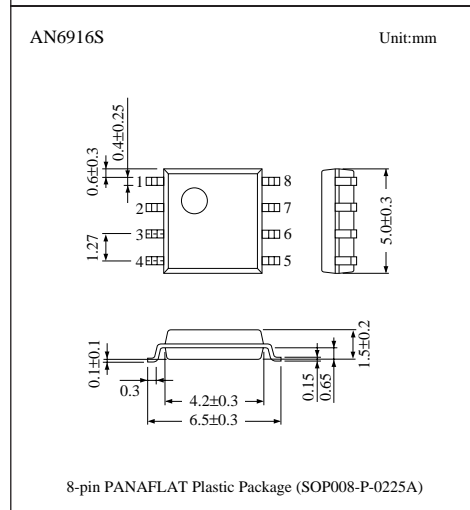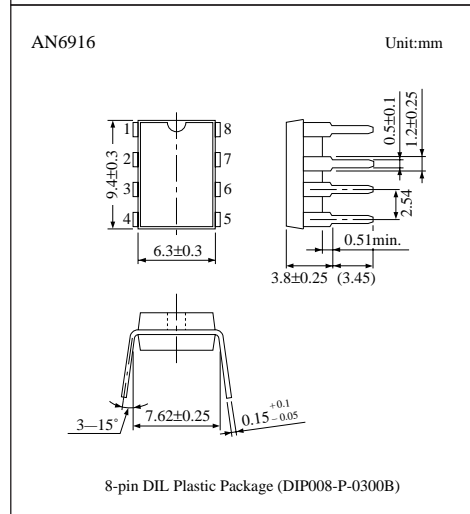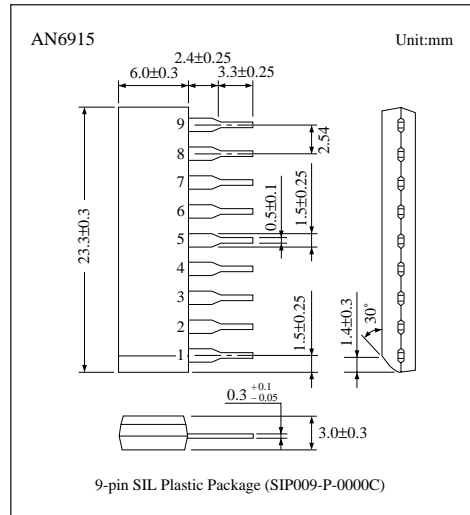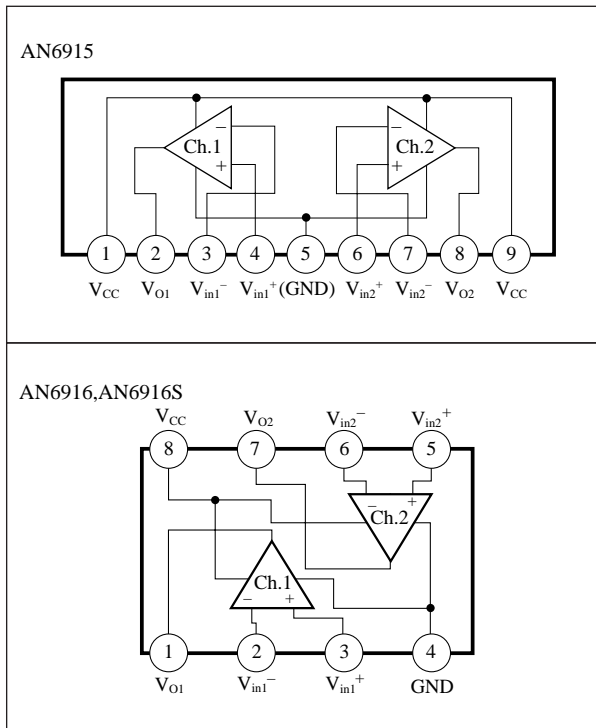

## Pin Descriptions

(AN6915)

Pin No.	Pin name
1	V <sub>CC</sub>
2	Ch.1 output
3	Ch.1 inverting input
4	Ch.1 non inverting input
5	GND
6	Ch.2 non inverting input
7	Ch.2 inverting input
8	Ch.2 output
9	V <sub>CC</sub>

(AN6916, AN6916S)

Pin No.	Pin name
1	Ch.1 output
2	Ch.1 inverting input
3	Ch.1 non inverting input
4	GND
5	Ch.2 non inverting input
6	Ch.2 inverting input
7	Ch.2 output
8	V <sub>CC</sub>

## Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	36	V
Common-mode input voltage	V <sub>ICM</sub> *1	-0.3 to +36	V
Differential input voltage	V <sub>ID</sub> *2	36	V
Output current	I <sub>OL</sub> *3	150	mA
Power dissipation	AN6915, AN6916	500	mW
	AN6916S	360	
Operating ambient temperature	T <sub>opr</sub>	-30 to +85	°C
Storage temperature	AN6915, AN6916	-55 to +150	°C
	AN6916S	-55 to +125	

\*1 The common mode input voltage is a voltage applied to the non-inverting input pin and inverting input pin simultaneously.


\*2 Differential input is equivalent to the potential difference between the non-inverting input pin and inverting input pin.

\*3 In case output level is "L".


## Electrical Characteristics (V<sub>CC</sub>=5V, Ta=25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Input offset voltage	V <sub>I (offset)</sub>		—	1	5	mV
Input offset current	I <sub>IO</sub>		—	1	50	nA
Input bias current	I <sub>Bias</sub>		—	50	200	nA
Voltage gain	G <sub>V</sub>	R <sub>L</sub> =15kΩ	—	200	—	V/mV
Common-mode input voltage range	V <sub>CM</sub>		0	—	V <sub>CC</sub> -1.5	V
Supply current	I <sub>CC</sub>	R <sub>L</sub> =∞	—	3.8	5.3	mA
Response time (1)	t <sub>PLH</sub>	R <sub>L</sub> =5.1kΩ	—	2	—	μs
Response time (2)	t <sub>PHL</sub>	R <sub>L</sub> =5.1kΩ	—	1	—	μs
Low level output voltage	V <sub>OL</sub>	V <sub>REF</sub> =0V, V <sub>I</sub> =1V, I <sub>SINK</sub> =70mA	—	0.14	0.4	V
Output leakage current	I <sub>O (Leak)</sub>	V <sub>REF</sub> =1V, V <sub>I</sub> =0V, V <sub>O</sub> =5V	—	—	0.1	μA


## ■ Characteristics Curve

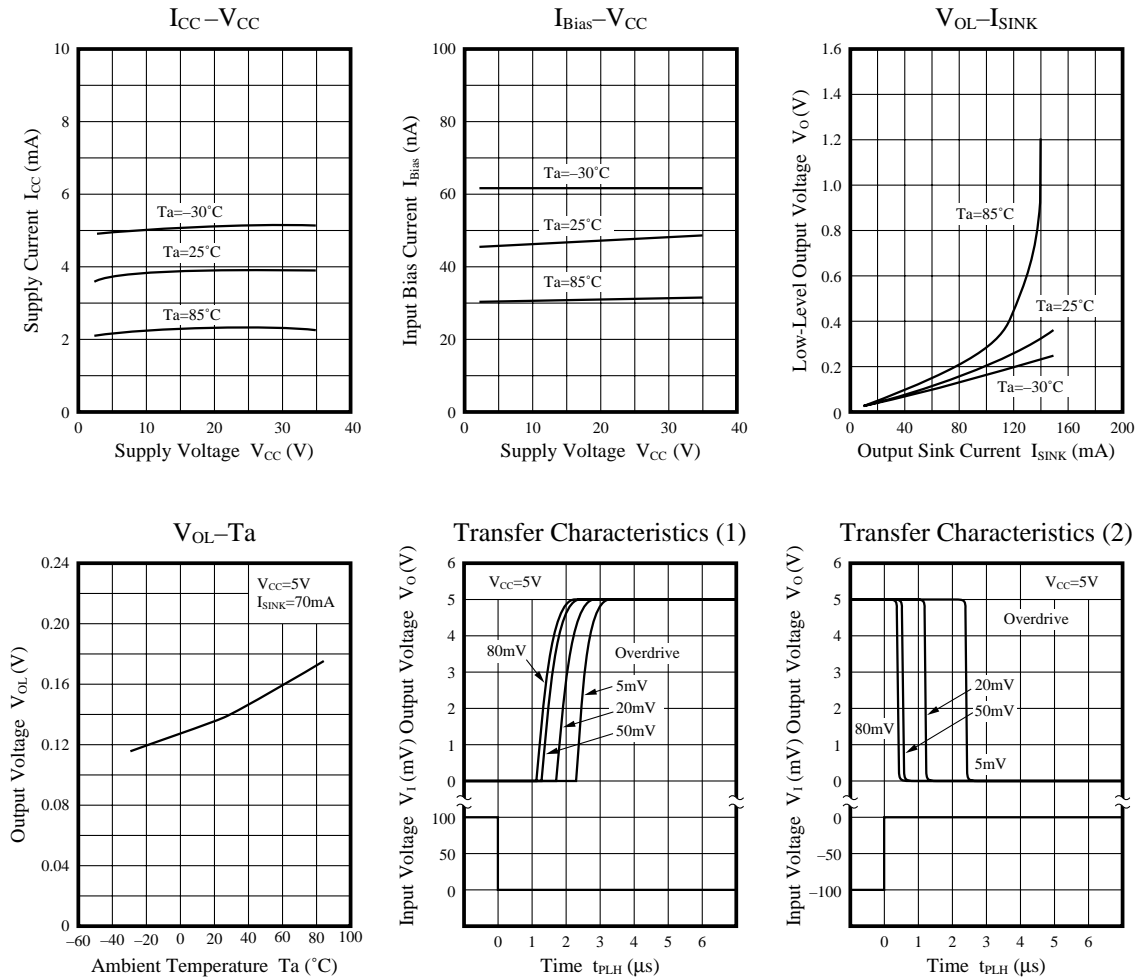

## ■ Schematic Diagram (1/2)

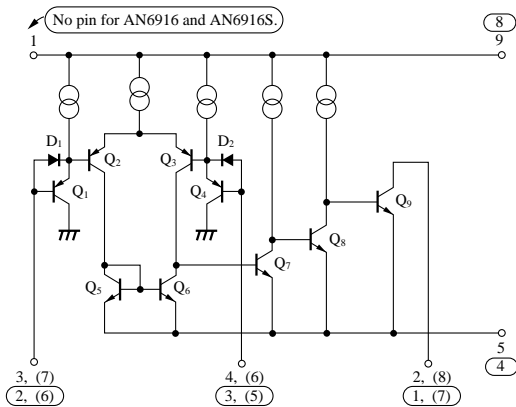

## ■ Application Circuit

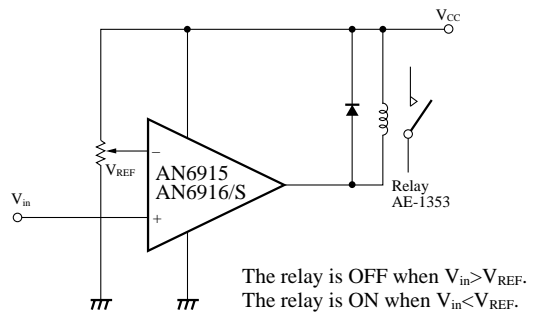

Note 1) The No. in  $\circ$  are pin No. of AN6916 and AN6916S.  
Note 2) The pin No. in ( ) are for Ch.2.