


### IGBT Power Module

Preliminary data

- Half-bridge
- Including fast free-wheeling diodes
- Package with insulated metal base plate
- $R_{G\ on,min} = 27\ \Omega$

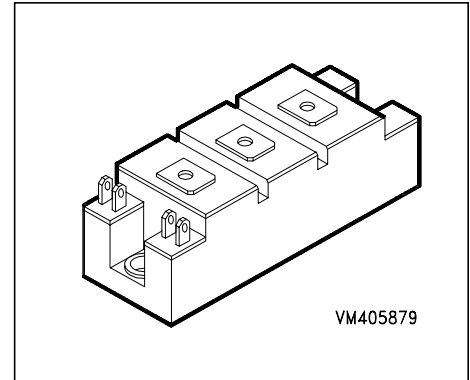

| Type              | $V_{CE}$ | $I_C$ | Package       | Ordering Code    |
|-------------------|----------|-------|---------------|------------------|
| BSM 50 GB 170 DN2 | 1700V    | 72A   | HALF-BRIDGE 1 | C67070-A2701-A67 |

### Maximum Ratings

| Parameter                               | Symbol      | Values        | Unit       |
|---|-------------|---------------|------------|
| Collector-emitter voltage               | $V_{CE}$    | 1700          | V          |
| Collector-gate voltage                  | $V_{CGR}$   | 1700          |            |
| $R_{GE} = 20\ k\Omega$                  |             |               |            |
| Gate-emitter voltage                    | $V_{GE}$    | $\pm 20$      |            |
| DC collector current                    | $I_C$       |               | A          |
| $T_C = 25\ ^\circ C$                    |             | 72            |            |
| $T_C = 80\ ^\circ C$                    |             | 50            |            |
| Pulsed collector current, $t_p = 1\ ms$ | $I_{Cpuls}$ |               |            |
| $T_C = 25\ ^\circ C$                    |             | 144           |            |
| $T_C = 80\ ^\circ C$                    |             | 100           |            |
| Power dissipation per IGBT              | $P_{tot}$   |               | W          |
| $T_C = 25\ ^\circ C$                    |             | 500           |            |
| Chip temperature                        | $T_j$       | + 150         | $^\circ C$ |
| Storage temperature                     | $T_{stg}$   | -55 ... + 150 |            |
| Thermal resistance, chip case           | $R_{thJC}$  | $\leq 0.25$   | K/W        |
| Diode thermal resistance, chip case     | $R_{thJCD}$ | $\leq 0.75$   |            |
| Insulation test voltage, $t = 1\ min.$  | $V_{is}$    | 4000          | Vac        |
| Creepage distance                       | -           | 20            | mm         |
| Clearance                               | -           | 11            |            |
| DIN humidity category, DIN 40 040       | -           | F             | -          |
| IEC climatic category, DIN IEC 68-1     | -           | 55 / 150 / 56 |            |

**Electrical Characteristics**, at  $T_j = 25\text{ °C}$ , unless otherwise specified

| Parameter | Symbol | Values |      |      | Unit |
|-----------|--------|--------|------|------|------|
|           |        | min.   | typ. | max. |      |

### Static Characteristics

|  |               |        |            |            |    |
|--|---------------|--------|------------|------------|----|
| Gate threshold voltage<br>$V_{GE} = V_{CE}, I_C = 4\text{ mA}$   | $V_{GE(th)}$  | 4.8    | 5.5        | 6.2        | V  |
| Collector-emitter saturation voltage<br>$V_{GE} = 15\text{ V}, I_C = 50\text{ A}, T_j = 25\text{ °C}$<br>$V_{GE} = 15\text{ V}, I_C = 50\text{ A}, T_j = 125\text{ °C}$        | $V_{CE(sat)}$ | -<br>- | 3.4<br>4.6 | 3.9<br>5.3 |    |
| Zero gate voltage collector current<br>$V_{CE} = 1700\text{ V}, V_{GE} = 0\text{ V}, T_j = 25\text{ °C}$<br>$V_{CE} = 1700\text{ V}, V_{GE} = 0\text{ V}, T_j = 125\text{ °C}$ | $I_{CES}$     | -<br>- | 0.4<br>1.6 | 0.5<br>-   | mA |
| Gate-emitter leakage current<br>$V_{GE} = 20\text{ V}, V_{CE} = 0\text{ V}$  | $I_{GES}$     | -      | -          | 320        | nA |

### AC Characteristics

|   |           |    |      |   |    |
|---|-----------|----|------|---|----|
| Transconductance<br>$V_{CE} = 20\text{ V}, I_C = 50\text{ A}$                                 | $g_{fs}$  | 18 | -    | - | S  |
| Input capacitance<br>$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$            | $C_{iss}$ | -  | 8    | - | nF |
| Output capacitance<br>$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$           | $C_{oss}$ | -  | 0.64 | - |    |
| Reverse transfer capacitance<br>$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$ | $C_{rss}$ | -  | 0.25 | - |    |

### Electrical Characteristics, at $T_j = 25\text{ °C}$ , unless otherwise specified

| Parameter | Symbol | Values |      |      | Unit |
|-----------|--------|--------|------|------|------|
|           |        | min.   | typ. | max. |      |

### Switching Characteristics, Inductive Load at $T_j = 125\text{ °C}$

|  |              |   |     |      |    |
|--|--------------|---|-----|------|----|
| Turn-on delay time<br>$V_{CC} = 1200\text{ V}$ , $V_{GE} = 15\text{ V}$ , $I_C = 50\text{ A}$<br>$R_{Gon} = 27\ \Omega$    | $t_{d(on)}$  | - | 350 | 700  | ns |
| Rise time<br>$V_{CC} = 1200\text{ V}$ , $V_{GE} = 15\text{ V}$ , $I_C = 50\text{ A}$<br>$R_{Gon} = 27\ \Omega$             | $t_r$        | - | 150 | 300  |    |
| Turn-off delay time<br>$V_{CC} = 1200\text{ V}$ , $V_{GE} = -15\text{ V}$ , $I_C = 50\text{ A}$<br>$R_{Goff} = 27\ \Omega$ | $t_{d(off)}$ | - | 650 | 1000 |    |
| Fall time<br>$V_{CC} = 1200\text{ V}$ , $V_{GE} = -15\text{ V}$ , $I_C = 50\text{ A}$<br>$R_{Goff} = 27\ \Omega$           | $t_f$        | - | 90  | 140  |    |


### Free-Wheel Diode

|   |          |   |            |          |               |
|---|----------|---|------------|----------|---------------|
| Diode forward voltage<br>$I_F = 50\text{ A}$ , $V_{GE} = 0\text{ V}$ , $T_j = 25\text{ °C}$<br>$I_F = 50\text{ A}$ , $V_{GE} = 0\text{ V}$ , $T_j = 125\text{ °C}$                        | $V_F$    | - | 2.3<br>2.1 | 2.8<br>- | V             |
| Reverse recovery time<br>$I_F = 50\text{ A}$ , $V_R = -1200\text{ V}$ , $V_{GE} = 0\text{ V}$<br>$di_F/dt = -600\text{ A}/\mu\text{s}$ , $T_j = 125\text{ °C}$                            | $t_{rr}$ | - | 0.3        | -        | $\mu\text{s}$ |
| Reverse recovery charge<br>$I_F = 50\text{ A}$ , $V_R = -1200\text{ V}$ , $V_{GE} = 0\text{ V}$<br>$di_F/dt = -600\text{ A}/\mu\text{s}$<br>$T_j = 25\text{ °C}$<br>$T_j = 125\text{ °C}$ | $Q_{rr}$ | - | 4<br>12    | -<br>-   | $\mu\text{C}$ |

### Power dissipation

$$P_{\text{tot}} = f(T_C)$$


parameter:  $T_j \leq 150^\circ\text{C}$

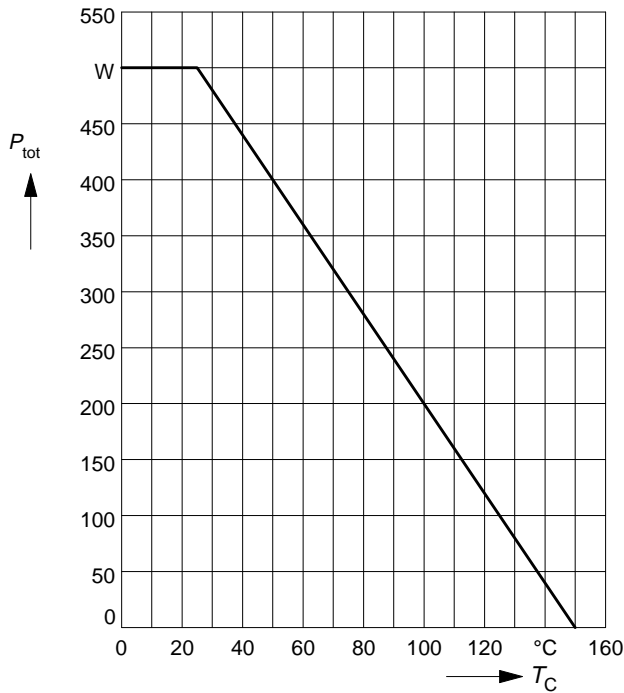

### Safe operating area

$$I_C = f(V_{\text{CE}})$$


parameter:  $D = 0, T_C = 25^\circ\text{C}, T_j \leq 150^\circ\text{C}$

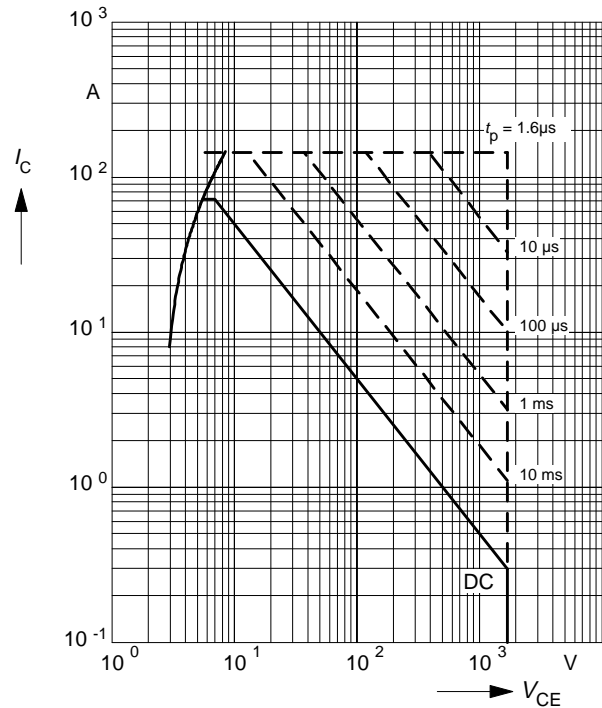

### Collector current

$$I_C = f(T_C)$$


parameter:  $V_{\text{GE}} \geq 15\text{ V}, T_j \leq 150^\circ\text{C}$

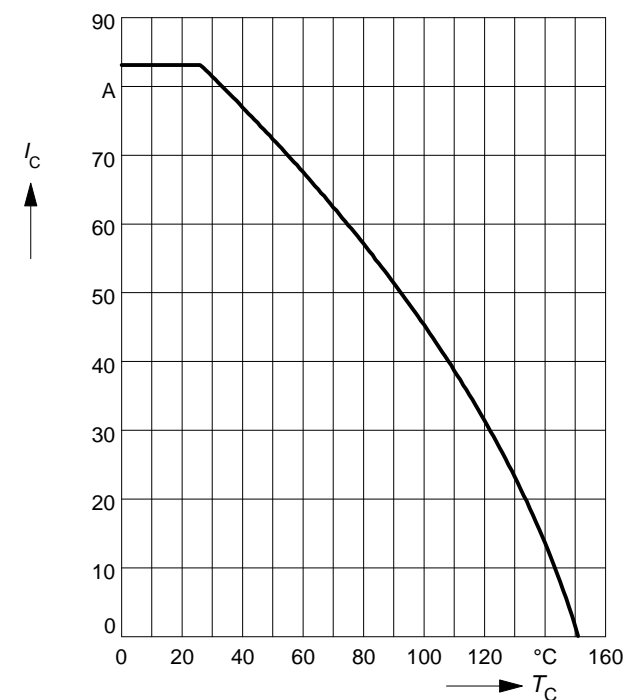

### Transient thermal impedance IGBT

$$Z_{\text{thJC}} = f(t_p)$$


parameter:  $D = t_p / T$

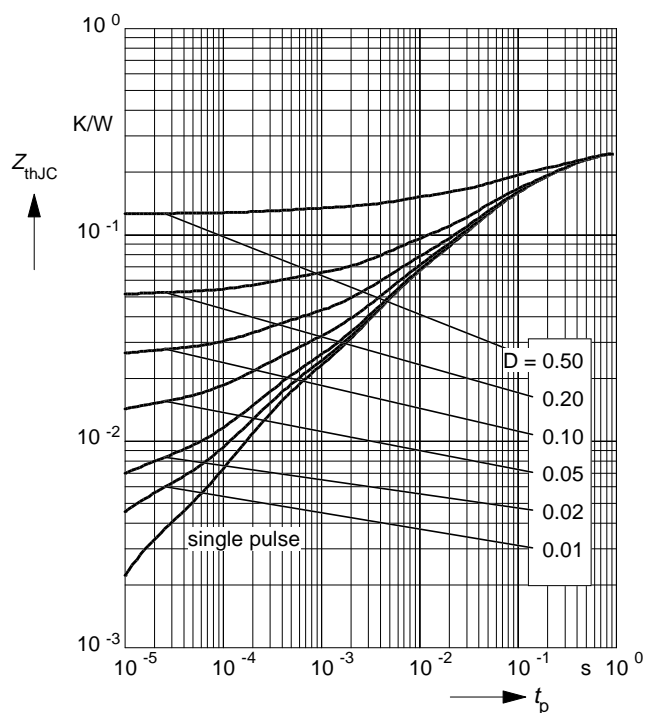

### Typ. output characteristics

$$I_C = f(V_{CE})$$


parameter:  $t_p = 80 \mu s$ ,  $T_j = 25 \text{ }^\circ\text{C}$

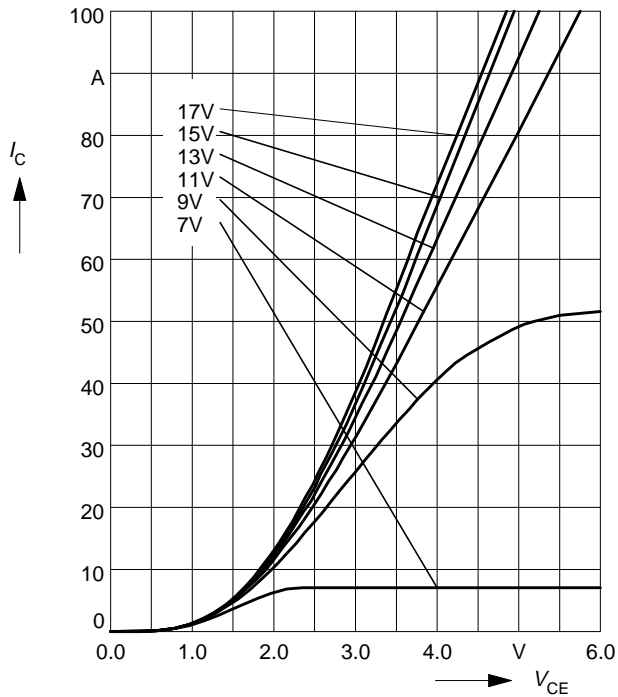

### Typ. output characteristics

$$I_C = f(V_{CE})$$


parameter:  $t_p = 80 \mu s$ ,  $T_j = 125 \text{ }^\circ\text{C}$

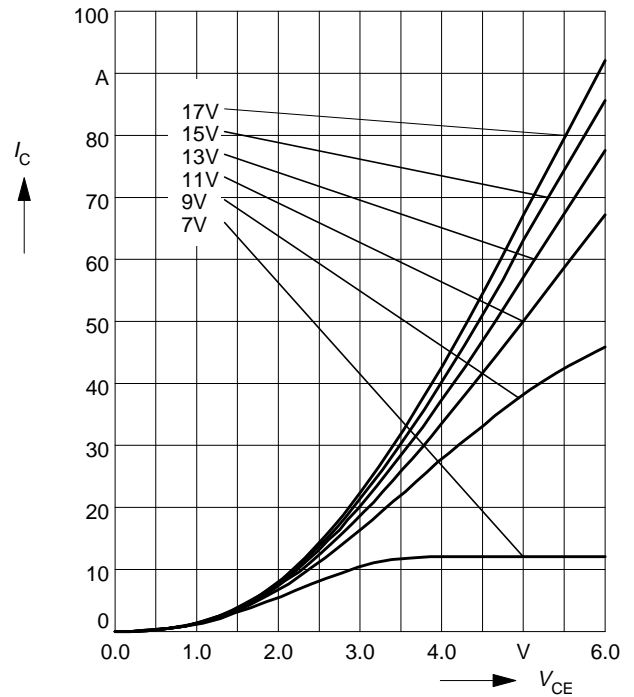

### Typ. transfer characteristics

$$I_C = f(V_{GE})$$


parameter:  $t_p = 80 \mu s$ ,  $V_{CE} = 20 \text{ V}$

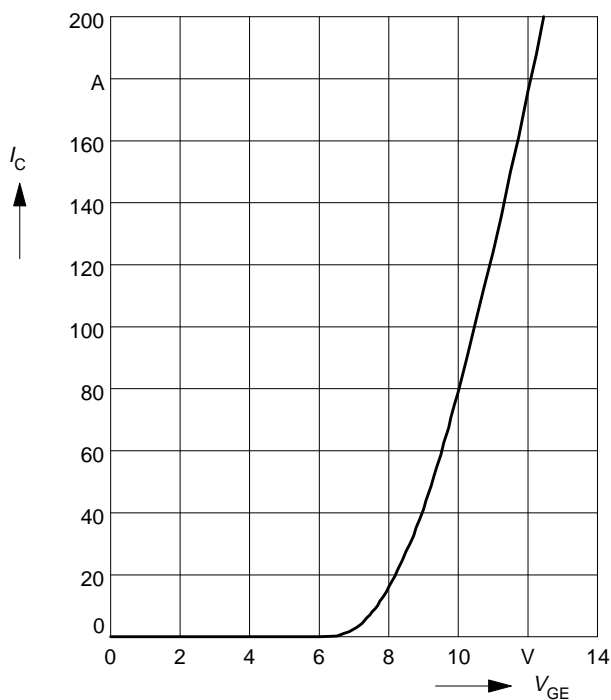

### Typ. gate charge

$$V_{GE} = f(Q_{Gate})$$


parameter:  $I_{C\ puls} = 50\ A$

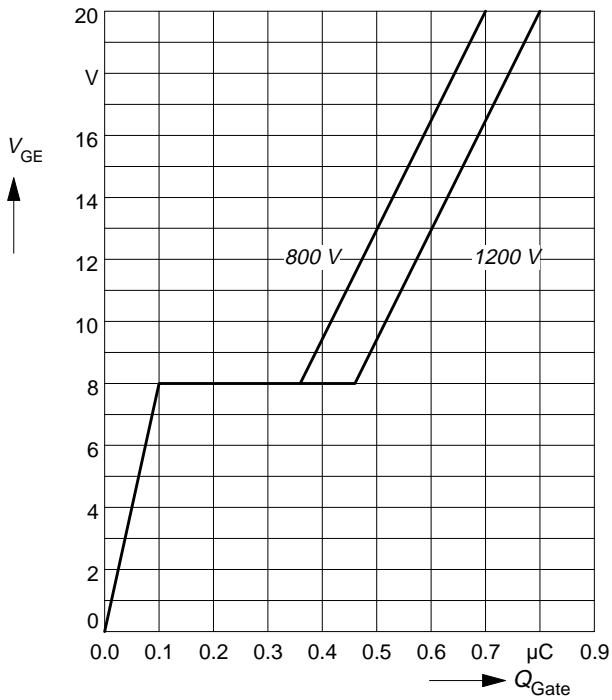

### Typ. capacitances

$$C = f(V_{CE})$$


parameter:  $V_{GE} = 0, f = 1\ MHz$

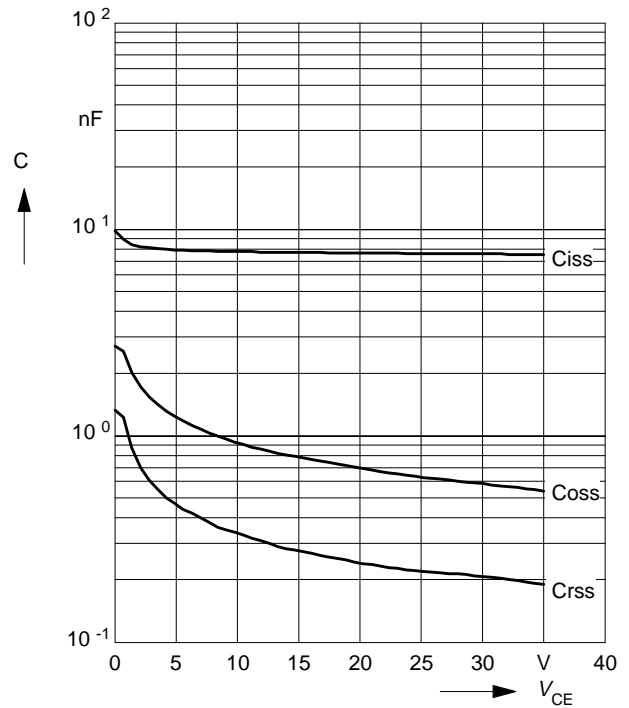

### Reverse biased safe operating area

$$I_{C\ puls} = f(V_{CE}), T_j = 150^\circ C$$


parameter:  $V_{GE} = 15\ V$

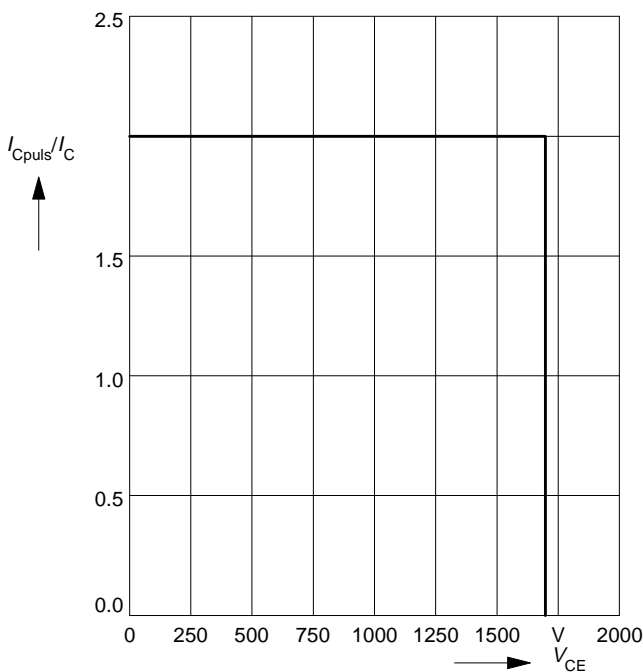

### Short circuit safe operating area


$$I_{C\ sc} = f(V_{CE}), T_j = 150^\circ C$$

parameter:  $V_{GE} = \pm 15\ V, t_{SC} \leq 10\ \mu s, L < 50\ nH$

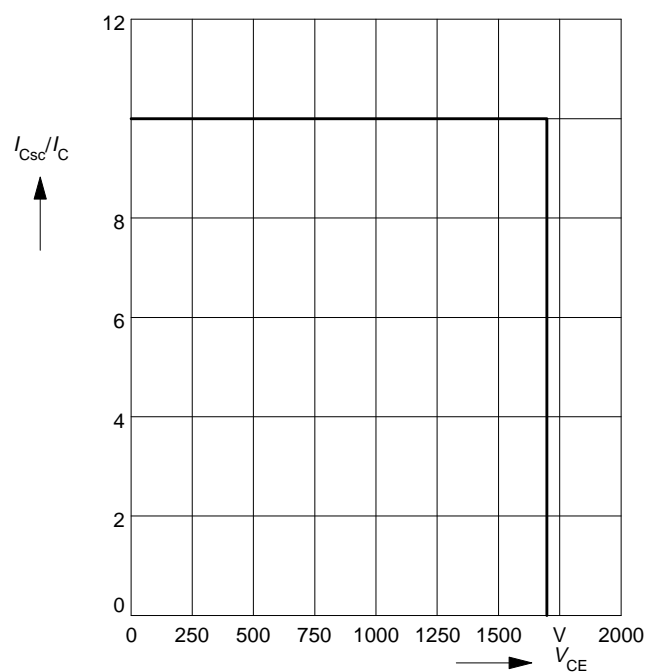


### Typ. switching time

$t = f(I_C)$ , inductive load,  $T_j = 125^\circ\text{C}$   
 par.:  $V_{CE} = 1200\text{ V}$ ,  $V_{GE} = \pm 15\text{ V}$ ,  $R_G = 27\ \Omega$

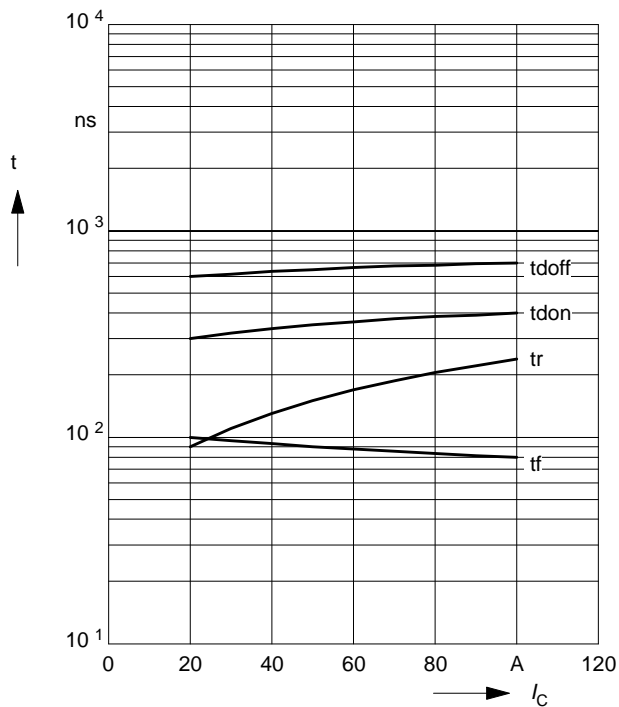


### Typ. switching time

$t = f(R_G)$ , inductive load,  $T_j = 125^\circ\text{C}$   
 par.:  $V_{CE} = 1200\text{ V}$ ,  $V_{GE} = \pm 15\text{ V}$ ,  $I_C = 50\text{ A}$

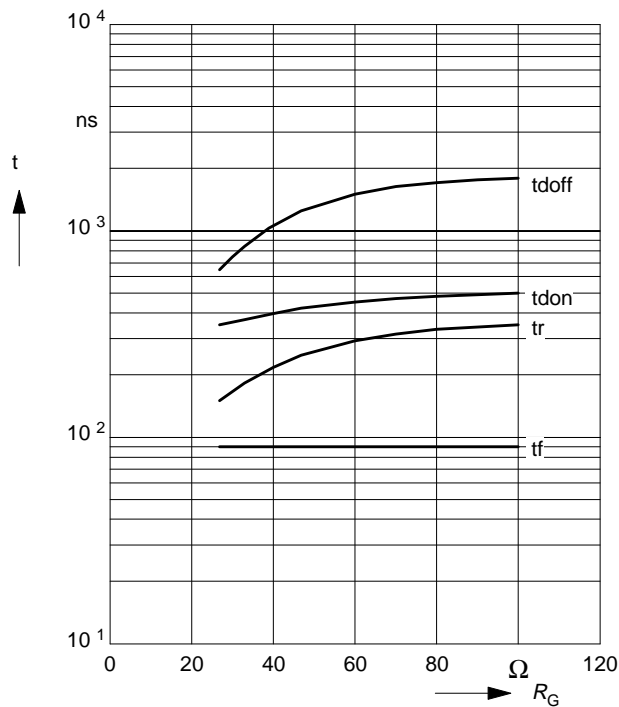


### Typ. switching losses

$E = f(I_C)$ , inductive load,  $T_j = 125^\circ\text{C}$   
 par.:  $V_{CE} = 1200\text{ V}$ ,  $V_{GE} = \pm 15\text{ V}$ ,  $R_G = 27\ \Omega$

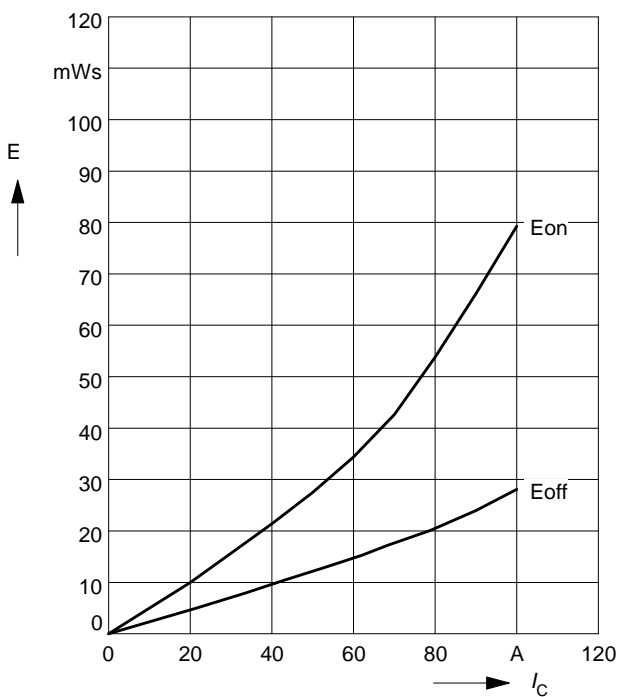


### Typ. switching losses

$E = f(R_G)$ , inductive load,  $T_j = 125^\circ\text{C}$   
 par.:  $V_{CE} = 1200\text{ V}$ ,  $V_{GE} = \pm 15\text{ V}$ ,  $I_C = 50\text{ A}$

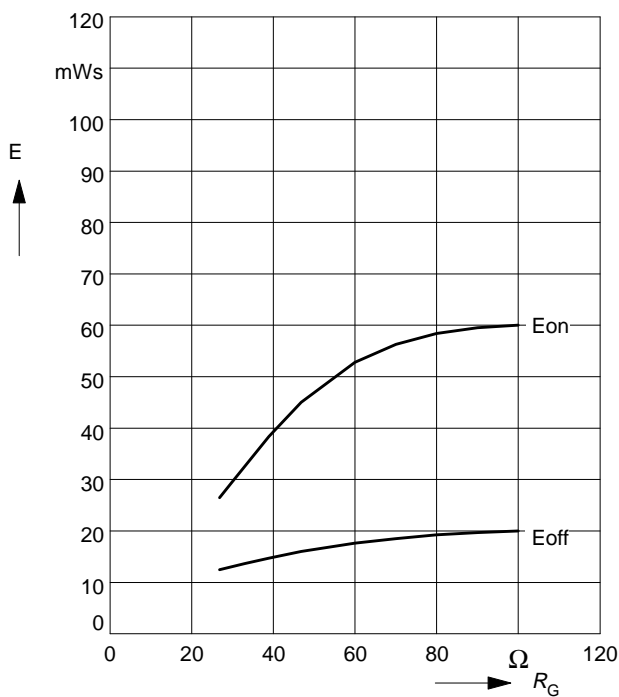


### Forward characteristics of fast recovery reverse diode $I_F = f(V_F)$

parameter:  $T_j$

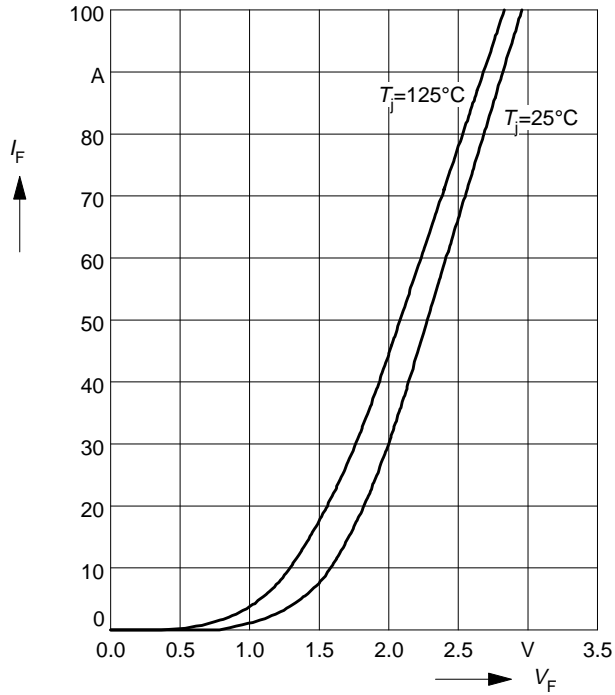


### Transient thermal impedance Diode $Z_{thJC} = f(t_p)$

parameter:  $D = t_p / T$

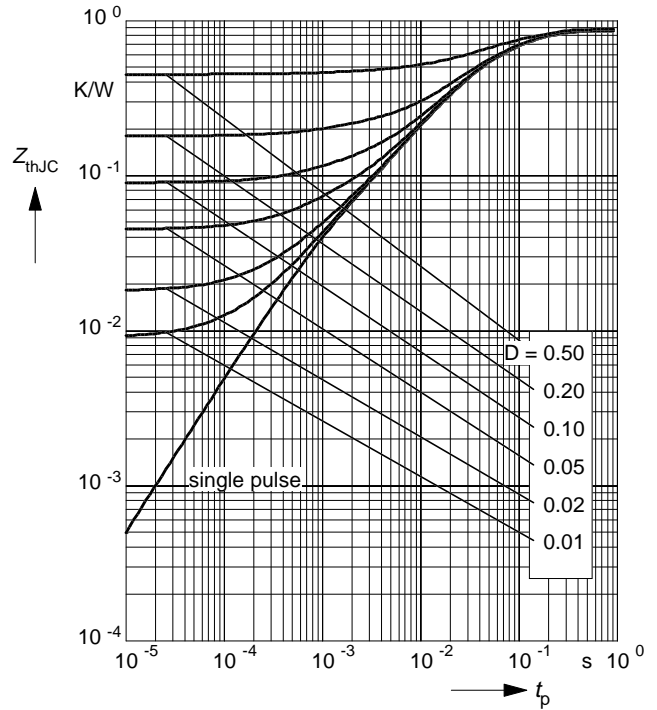



### Circuit Diagram

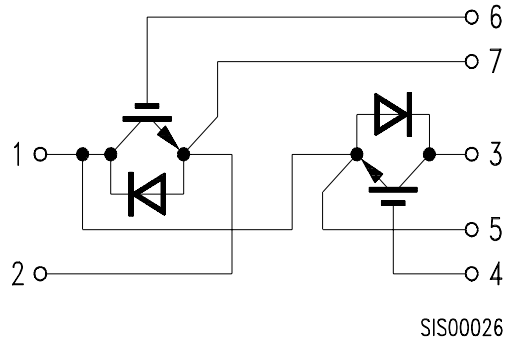

### Package Outlines

Dimensions in mm

Weight: 250 g

