

7-UNIT 150mA SOURCE TYPE DARLINGTON TRANSISTOR ARRAY

6249826 MITSUBISHI ELEK (LINEAR) 80C 09313 D T-43-25

DESCRIPTION

The M54560P, 7-channel source driver, consists of 7 PNP and 7 NPN transistors, connected to form high current gain driver with PNP action.

FEATURES


- High output sustaining voltage to 40V
- Output source current to 150mA
- Integral diode for transient suppression
- Active "L" input
- Wide operating temperature range ($T_a = -20 \sim +75^\circ\text{C}$)

APPLICATION

Relay and printer driver, LED, incandescent or fluorescent display driver, Interfacing for standard MOS/BIPO-LAR logics


FUNCTION

The M54560P is comprised of seven PNP-NPN darlington source driver pairs with $20k\Omega$ series input resistors. Each output has an integral diode for inductive load transient suppression. The anodes of the diodes and the substrate connected together to pin 9. The outputs are capable of driving 150mA and are rated for operation with output voltages of up to 40V. The output is turned ON by switching the input low.




16-pin molded plastic DIP

PIN CONFIGURATION (TOP VIEW)

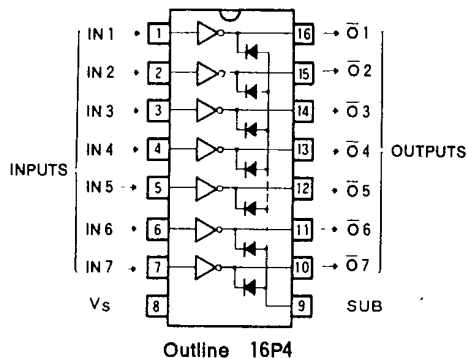

CIRCUIT SCHEMATIC

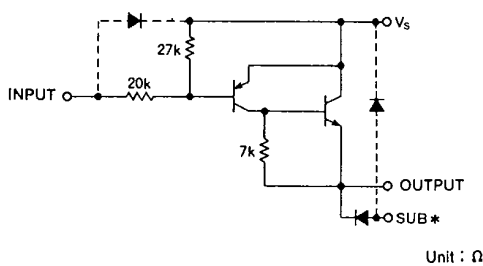

ABSOLUTE MAXIMUM RATINGS ($T_a = -20 \sim +75^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V_{CEO}	Output sustaining voltage	Output is in "L"	-0.5~+40	V
V_s	Supply voltage		40	V
V_i	Input voltage		0~+40	V
I_o	Output current	Per channel current at "H" output	-150	mA
I_F	Clamp diode forward current		-150	mA
V_R	Clamp diode reverse voltage		40	V
P_d	Power dissipation	$T_a = 25^\circ\text{C}$	1.47	W
T_{opr}	Operating ambient temperature range		-20~+75	$^\circ\text{C}$
T_{stg}	Storage temperature range		-55~+125	$^\circ\text{C}$

7-UNIT 150mA SOURCE TYPE DARLINGTON TRANSISTOR ARRAY



RECOMMENDED OPERATIONAL CONDITIONS ($T_a = -20 \sim +75^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min	Typ	Max	
V_S	Supply voltage	0		40	V
I_O	Output current per channel	Percent duty cycle less than 90%	0	-100	mA
		Percent duty cycle less than 100%	0	-50	
V_{IH}	"H" Input voltage	$V_S - 0.2$		$V_S + 0.3$	V
V_{iL}	"L" Input voltage	$I_O = -100\text{mA}$	0	$V_S - 5$	V
		$I_O = -50\text{mA}$	0	$V_S - 3.5$	

ELECTRICAL CHARACTERISTICS ($T_a = -20 \sim +75^\circ\text{C}$, unless otherwise noted)


Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$I_{S(\text{leak})}$	Supply leakage current	$V_S = 40\text{V}$			100	μA
$V_{CE(\text{sat})}$	Output saturation voltage	$V_I = V_S - 5\text{V}, I_O = -100\text{mA}$		0.82	1.5	V
		$V_I = V_S - 3.5\text{V}, I_O = -50\text{mA}$		0.75	1.2	
I_I	Input voltage	$V_I = V_S - 8.5\text{V}$		-380	-670	μA
V_F	Clamp diode forward voltage	$I_F = -100\text{mA}$		-1.1	-2.4	V
V_R	Clamp diode reverse voltage	$I_R = 100\mu\text{A}$	40			V
h_{FE}	DC forward current gain	$V_S - V_O = 4\text{V}, I_O = -100\text{mA}, T_a = 25^\circ\text{C}$	500	2800		-

TYPICAL CHARACTERISTICS

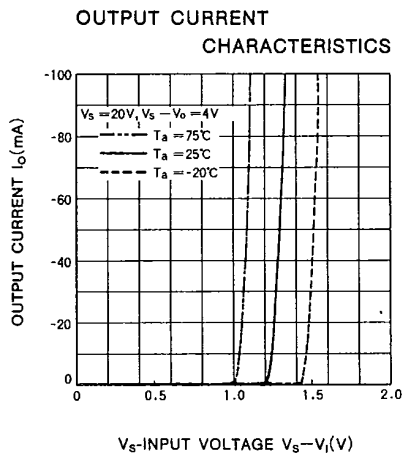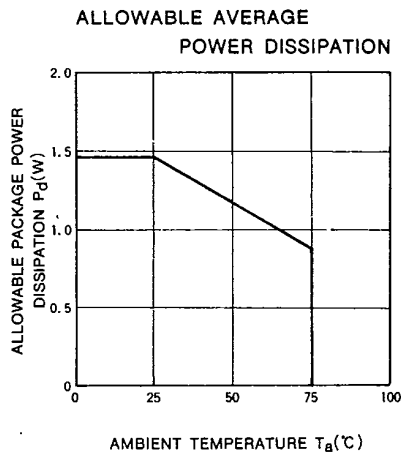


7-UNIT 150mA SOURCE TYPE DARLINGTON TRANSISTOR ARRAY

ALLOWABLE OUTPUT CURRENT AS A FUNCTION OF DUTY CYCLE

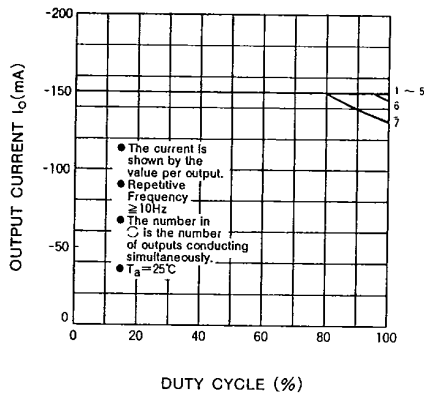

ALLOWABLE OUTPUT CURRENT AS A FUNCTION OF DUTY CYCLE

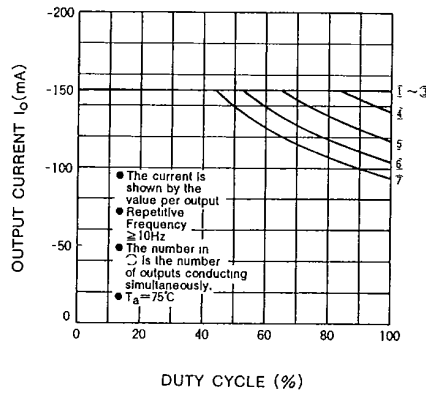

DC CURRENT GAIN CHARACTERISTICS

